

S316

Bright projection

- Bright projection – 3200 ANSI Lumens
- SVGA resolution, 15,000:1 contrast ratio, HDMI input
- Low ownership costs - up to 10,000 hours² lamp life
- Lightweight and portable, carry bag included



S316

Simple to connect to with HDMI connectivity the S316 is ideal for use in a meeting room or classroom. The bright 3200L with 15,000:1 contrast allows you to project bright, crystal clear images with superb colours using DLP®, BrilliantColor™ and Dynamic Eco+ technology. The S316 also provides you with energy and cost saving features with an incredible lamp life of up to 10,000 hours. It also incorporates a built in speaker, Full 3D technology and optional wireless capabilities allowing you to present wirelessly from a PC or mobile device with ease. Installed or on the move with the included carry bag, the versatile S316 is the perfect projector for all your display needs.


Green Solutions



Eco+ technology from Optoma increases our commitment to reducing the impact we all make on the environment

Dynamic Mode

Saving energy saves money! Dynamic Mode reduces the power consumption to as little as 30%. This intelligent feature can more than double your expected lamp life, lowering the total cost of ownership and reducing maintenance.

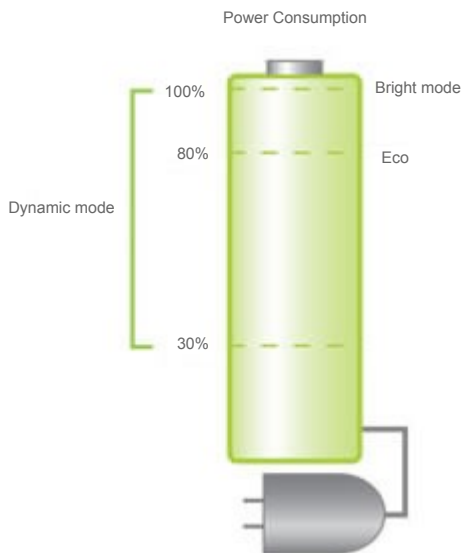

Eco AV Mute

Stay in control of your presentation with the Eco AV mute feature. Direct your audience's attention away from the screen by blanking the image when no longer needed. This also instantly reduces the power consumption to 25%, further prolonging the life of your lamp.



Eco AV mute off
100% power consumption


Eco AV mute on
25% power consumption

Rapid Off

It takes less than 10 seconds for the projector to power up and shutdown, saving both time and energy.

Quick Resume

Save time by not waiting for the projector to cool down before it can power up again. If the projector is accidentally turned off, this feature allows the projector to be instantly powered on again, if selected within a period of 100 seconds.

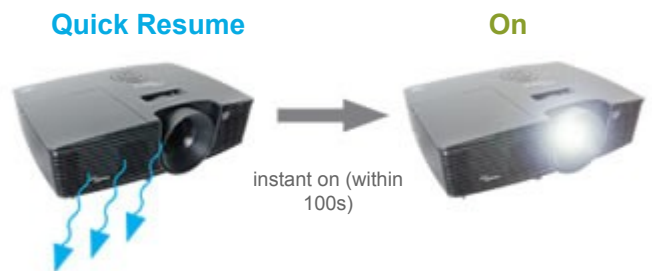

Full 3D

Using the inherent speed of DLP technology, The Optoma S316. Full 3D projector can display true 3D content from any 3D display device, such as 3D Blu-ray, PS3, Xbox and Sky3D.

Audio Performance

Built-in 2W speaker offers excellent audio support. The S316 is easy to set up without the need for costly external speakers




Brightness Where It Matters

Room lighting can be unpredictable for the business traveller; you never know what to expect. The S316 has a powerful lamp producing 3000 ANSI Lumens, so you can be sure your presentation will be bright and clear.



Cost Saving – Long Lamp Life

Reduce the number of lamp changes with lamp life of up to 10,000 hours² using the Education Cycle.

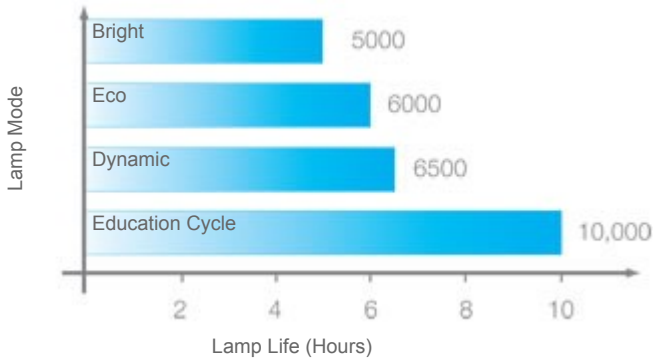

Clear, Focused Images

Produce a stunning 15,000:1 contrast ratio for pin sharp graphics and crystal clear text using the unique Dynamic mode feature.

Combined with DarkChip3 technology for Texas Instruments, Dynamic mode automatically adjusts the lamp output, based on the brightness information of each frame; to create a stunning high contrast ratio. Bright scenes are crisp and clear, while dark scenes remain detailed with deep blacks which gives exceptional light and shade detail.



2000:1 Contrast Ratio



15,000:1 Contrast Ratio

Digital Connectivity

Simple and easy – connect using a HDMI cable for a digital audio and video connection to your projector giving you a clear projected image with sound.



Wireless Presenting (optional extra)

Making presentations couldn't be easier using the optional wireless features of the S316. Using the Wireless Adapter you can connect and display presentations and video material wirelessly from a laptop, PC or mobile device. (Additional power required)



We know that improving our products is the best way to reduce our impact on the environment. That's why at Optoma we design our products to have a long usable life, use fewer materials, ship with the minimum packaging and be free of all possible toxic substances. Naturally, energy efficiency and being recyclable are built in at the design stage. With each new product, we strive towards minimising our environmental impact.


S316 Specification

| | |
|---------------------------------------|--|
| Display Technology | Single 0.55" SVGA DC3 DMD chip DLP® Technology by Texas Instruments |
| Native Resolution | SVGA 800 x 600 |
| Brightness ¹ (Bright Mode) | 3200 ANSI Lumens |
| Contrast | 15,000:1 |
| Noise Level (Eco mode) | 29dB |
| Weight (kg) | 2.35 |
| I/O Connectors | Inputs: HDMI (v1.4a 3D), 2 x VGA (YPbPr/RGB/Wireless), S-Video, Composite, 2 x Audio In 3.5mm Outputs: VGA Out, Audio Out 3.5mm Control: RS232 - 9 Pin |
| Maximum Resolution | UXGA 1600 x 1200 |
| Computer Compatibility | UXGA, SXGA, XGA, SVGA, VGA, Mac |
| Video Compatibility | PAL (B, D, G, H, I, M, N, 4.43MHz), NTSC (M, J, 3.58MHz, 4.443MHz), SECAM (B, D, G, K, K1, L, 4.25MHz, 4.4MHz, 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz) 1080p(24/50/60Hz) |
| Displayable Colours | 1073.4 Million |
| Projection Lens | F/2.41~2.55; f=21.8~23.98mm, 1.1x Manual Zoom |
| Throw Ratio | 1.95 - 2.15:1 |
| Projection Screen Size | 0.70 - 7.62m (22.9" - 300") Diagonal 4:3 |
| Projection Distance | 1.2 - 12 metres |
| Zoom Type | 1.1x Manual |
| Aspect Ratio | 4:3 Native, 16:9 Compatible |
| Offset | 115% |
| Horizontal Scan Rate | 15.3 - 91.1kHz |
| Vertical Scan Rate | 24 - 85Hz |
| Lamp Type | 190W |
| Keystone Correction | ± 40° Vertical |
| Audio | 2W |
| Dimensions (W x D x H) | 314.6 x 222.6 x 101.7 |
| Remote Control | Card style remote with direct source selecting |
| Power Supply | 100-240V, 50-60Hz |
| Power Consumption | 225W BRIGHT mode < 0.5W Standby mode, 191W Eco mode < 0.5W Standby mode |
| Operating Conditions | 5°C - 40°C, Max. Humidity 85%, Max. Altitude 3000m |
| Uniformity | 80% |
| Security | Security Bar, Kensington Lock, Password Protection |
| Standard Accessories | Carry Bag, AC Power Cord, VGA Cable, Infra Red Remote Control with Batteries, Quick Start Card, CD User Manual, Warranty Card |
| Optional Accessories | Ceiling Mount Kit, WPS |
| RoHS | Compliant |
| 3D Support | The 3D features of Optoma projectors can only be used with compatible 3D content. Typical applications include use with 3D educational or 3D design and modelling systems. 3D TV broadcast systems, (SKY in the UK), Blu-ray 3D™ and 3D games from the Sony® PS3 or Microsoft® Xbox 360 are now supported as part of the HDMI v1.4a specification. |
| 3D Viewing | Requires the Optoma DLP-Link shutterglasses - available separately. |
| 3D Compatibility | Side-by-Side: 1080i50 / 60, 720p50 / 60 Frame-pack: 1080p24, 720p50 / 60 Over-Under: 1080p24, 720p50 / 60 |
| On Screen Display | 19 Languages: English, German, French, Italian, Spanish, Portuguese, Polish, Dutch, Russian, Finnish, Swedish, Greek, Norwegian/Danish, Hungarian, Czech, Turkish, Romanian, Farsi and Arabic. |
| Optional Wireless | Yes |
| Features | Eco+, Up to 10,000 hours lamp life - Education Cycle |

Easy To Use Remote

S316 Remote Control

1. Power
2. Source
3. VGA 1 / VGA 2
4. HDMI
5. Format
6. Up / Keystone +
7. Right / Volume +
8. Enter
9. Zoom
10. Down / Keystone -
11. Lamp Mode
12. Mute
13. AV Mute
14. Menu
15. Left / Volume -
16. 3D
17. Video / S-Video
18. ReSync

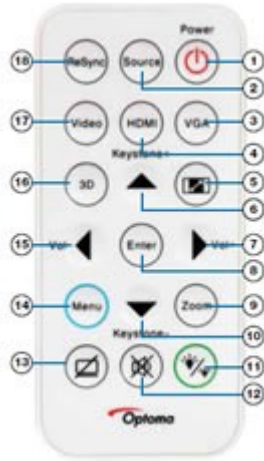

S316 Connections

1. S-Video
2. VGA Out
3. VGA 1
4. VGA 2
5. Video
6. Audio2 In
7. Security Bar
8. Audio Out
9. Audio1 In
10. RS232 9 Pin
11. USB (Service / Mouse)
12. HDMI
13. Power
14. Kensington Lock

Exceptional Connectivity / Multiple Terminals



S316 distance Table aspect ratio 4:3

| Projection Distance (m) | Max. Horizontal Image Size (m) | Min. Horizontal Image Size (m) | Max. Vertical Image Size (m) | Min. Vertical Image Size (m) | Max Diagonal Image Size (m) | Max Diagonal Image Size (inch) | Max. Image Offset (m) |
|-------------------------|--------------------------------|--------------------------------|------------------------------|------------------------------|-----------------------------|--------------------------------|-----------------------|
| 1.20 | 0.62 | 0.56 | 0.46 | 0.42 | 0.77 | 30.31 | 0.07 |
| 2.00 | 1.03 | 0.93 | 0.77 | 0.70 | 1.28 | 50.52 | 0.12 |
| 2.50 | 1.28 | 1.16 | 0.96 | 0.87 | 1.60 | 63.15 | 0.14 |
| 3.00 | 1.54 | 1.40 | 1.16 | 1.05 | 1.92 | 75.78 | 0.17 |
| 4.00 | 2.05 | 1.86 | 1.54 | 1.40 | 2.57 | 101.04 | 0.23 |
| 5.00 | 2.56 | 2.33 | 1.93 | 1.75 | 3.21 | 126.30 | 0.29 |
| 6.00 | 3.08 | 2.79 | 2.31 | 2.10 | 3.85 | 151.56 | 0.35 |
| 7.00 | 3.59 | 3.26 | 2.70 | 2.45 | 4.49 | 176.82 | 0.40 |
| 8.00 | 4.10 | 3.72 | 3.08 | 2.80 | 5.13 | 202.08 | 0.46 |
| 9.00 | 4.62 | 4.19 | 3.47 | 3.15 | 5.77 | 227.34 | 0.52 |
| 10.00 | 5.13 | 4.65 | 3.86 | 3.50 | 6.42 | 252.60 | 0.58 |
| 11.00 | 5.64 | 5.12 | 4.24 | 3.85 | 7.06 | 277.86 | 0.64 |
| 12.00 | 6.15 | 5.58 | 4.63 | 4.20 | 7.70 | 303.12 | 0.69 |

For guide purposes only

S316 is capable of 16:9 aspect ratio projection. When projecting a 16:9 image the image sizes, screen height and offset information will differ from the above.



Optoma Europe Ltd.

42 Caxton Way, Watford Business Park, Watford, Hertfordshire, UK. WD18 8QZ

www.optoma.co.uk

¹Brightness and lamp lifetime will vary depending on the selected projector mode, environmental conditions and usage. As is common with all lamp based projectors, brightness will decrease over the lamp lifetime. ²Typical lamp life achieved through testing and will vary according to operational use and environmental conditions. 10,000 hours lamp life is based on a daily cycle that reflects projector usage in a typical education environment. Details of this cycle are available on request. ³Optoma guarantees that in normal use, Optoma DLP® colour quality will be indistinguishable from when new. Exclusions: (a) Guarantee is voided if the projector is subject to damage through misuse. (b) Guarantee may be void in industrial or commercial entertainment environments where dust or smoke is excessive (c) Guarantee will not apply if lamp brightness is below 50% due to wear or if the projector is not working due to other faults. (d) Over time worn lamps within all projector types will show a slight colour variance. Copyright © 2013, Optoma Europe Ltd. All other product names and company names used herein are for identification purposes only and may be trademarks or registered trademarks of their respective owners. Errors and omissions excepted, all specifications are subject to change without notice. DLP®, BrilliantColor™ and the DLP logo are registered trademarks of Texas Instruments. All images of products are for representation purposes only. Whilst every care is taken to provide accurate images of our products, actual products may differ slightly. Some product images may have been digitally altered by us to add an Optoma logo to the front panel. Optoma reserves the right to amend or alter actual product, product specifications or product images without notice. Some images may be simulated.

05/02/2014 12:24